

Model Answer

Highway and air port Eng.

من الطرق والطرق

Dr. Samh A. Gadal

الصفحة رقم

لا شيء عبير

لديني بعض الامور ...

من الطرق والطرق للام عبير

د/ سامح عادل

Q1-a.

(20)

11

$$e) D = 3^\circ \quad R = \frac{1750}{3} = 584 \Omega \quad \omega = \frac{7.5}{2} = 3.75$$

$$V = 110 \text{ kph} \quad \text{assum } f = 0.3 \quad n = 2$$

$$S = 0.278 (110) \cdot 2.5 + \frac{110^2}{255 (0.3)} \approx 235 \Omega$$

$$M = \frac{S^2}{8R} = \frac{(235)^2}{8 \cdot 584} = 11.82 \Omega$$

$$M = y + n(hw + ey) = 11.82$$

$$y + 2(0.6 + 0.08 \cdot y) = 11.82$$

$$y = 9.16 \Omega$$
$$S = y + \frac{\omega}{2} = 11.04 \Omega$$
$$c) D = 5 \quad R = \frac{1750}{5} = 350 \Omega$$

$$M = \frac{S^2}{8R} = 19.72 \Omega$$

$$19.72 = y + 2(0.6 + 0.1 \cdot y)$$

$$y = 15.43 \Omega$$

$$S = y + \frac{\omega}{2} = 17.31 \Omega$$

$$S = 17.31 \Omega$$

b)

$$SSD = 0.278 * 90 * 2.5 + \frac{(90)^2}{2.55 * 0.3} \approx 169 \text{ m} \quad \text{⑩} \quad \text{②}$$

for $S < L$

$$L = \frac{A S^2}{120 + 3.5 S}$$

$$L = \frac{A (169)^2}{120 + 3.5 (169)} = 40.14 A$$

$$L = 40.14 A$$

for $S < L$


$$L = 2 S - \frac{120 + 3.5 S}{A} \quad \text{④}$$

$$L = 338 - \frac{711.5}{A}$$

A	2	4	6	8	
⑩ L	80.28	160.56	240.84	321.12	
④ L	—	160.125	219.4	249	

$10^3 L$

3

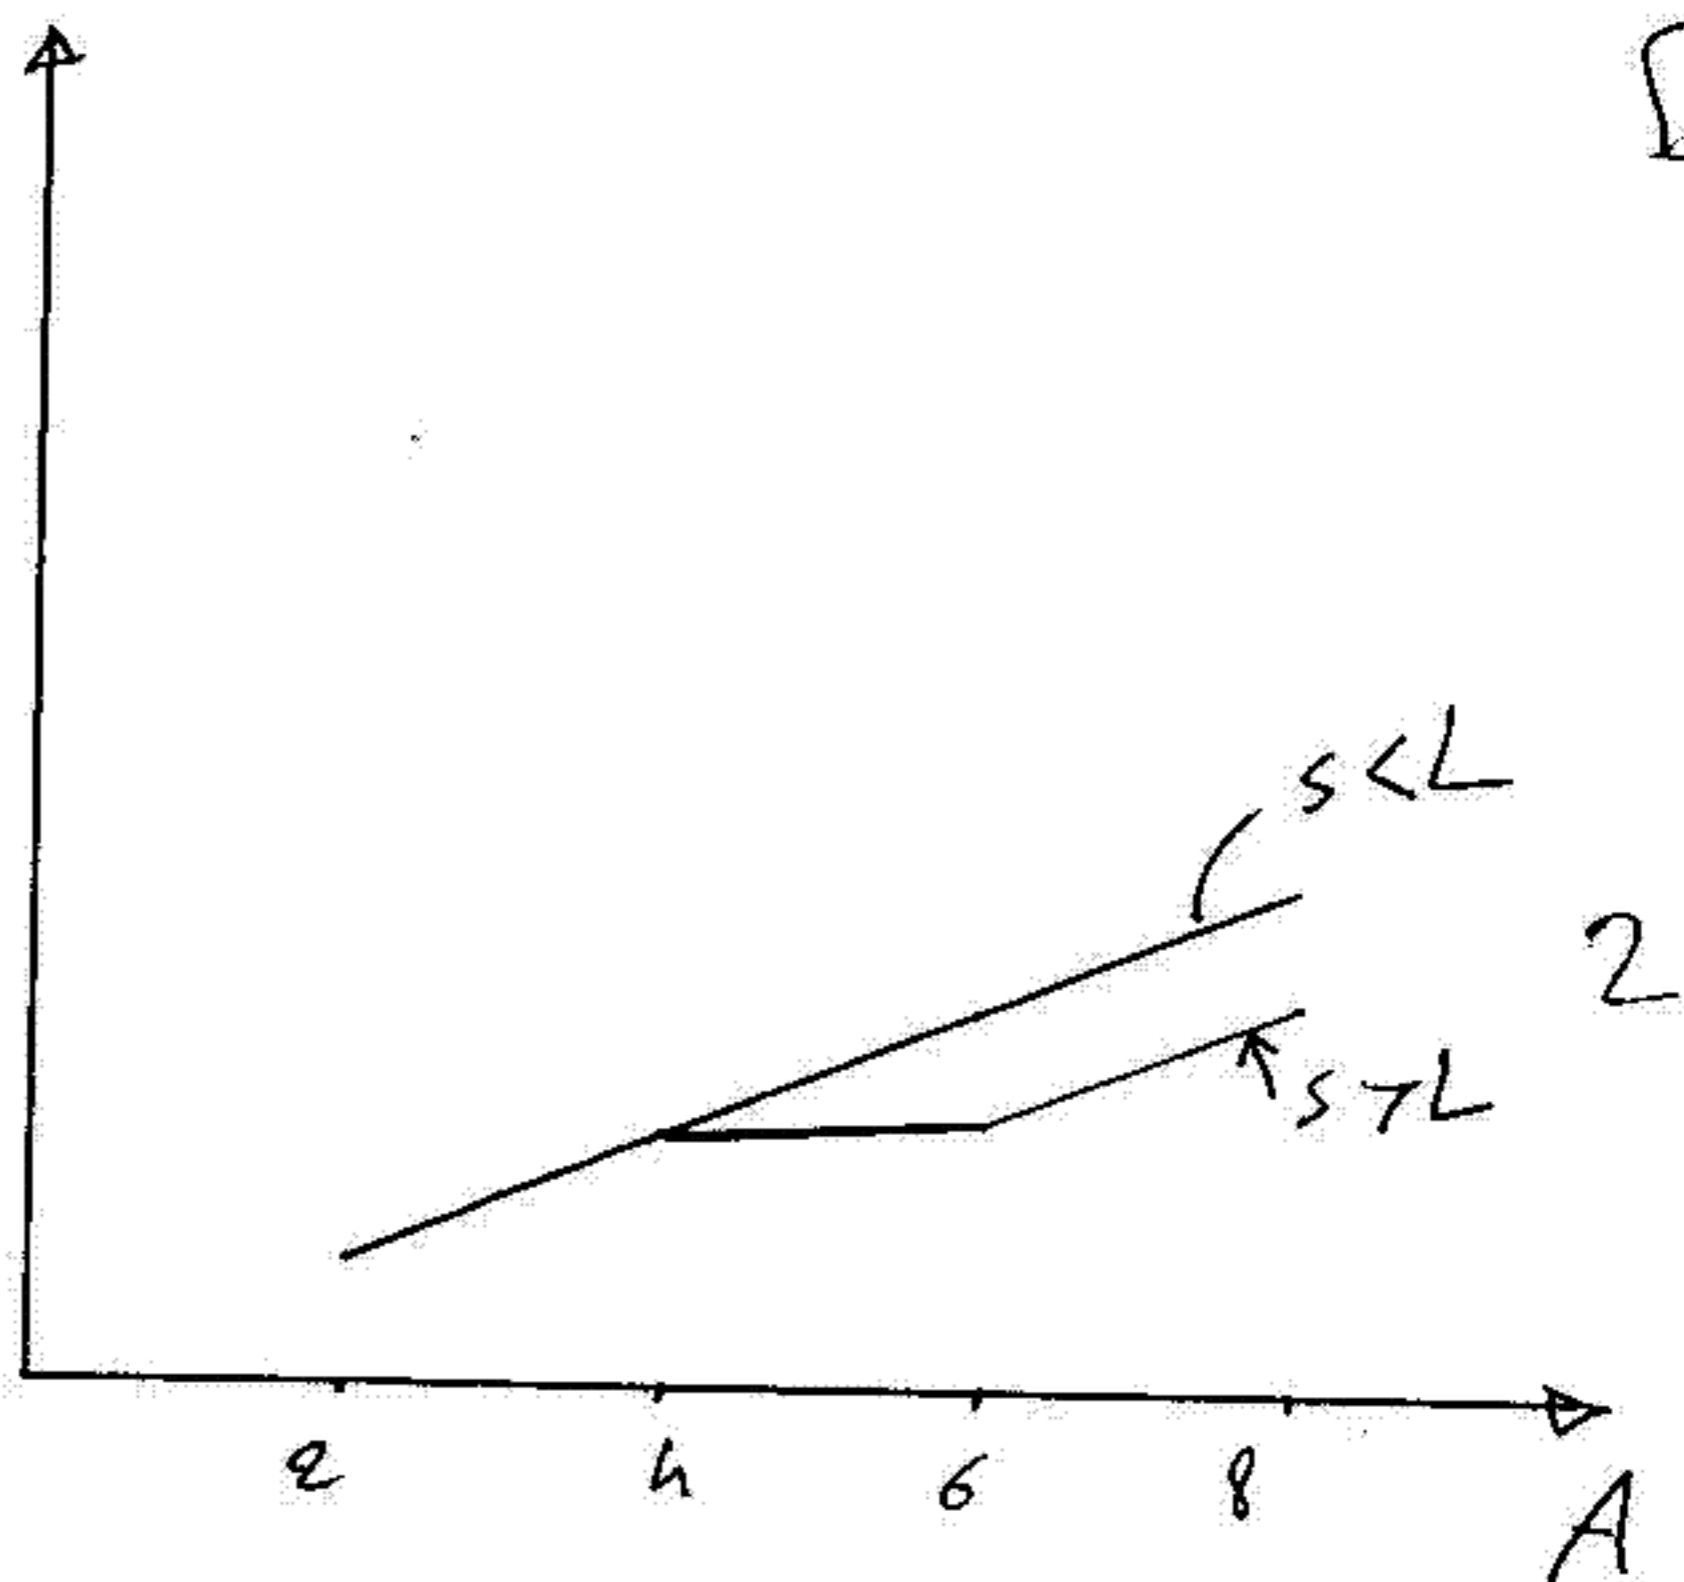

Q2.

30

$g_1 = +3$

$g_2 = -2\%$

15

$A = |g_1 - g_2| = 5$

$g_{av} = \frac{|+3 + (-2)|}{2} = 0.5$

$P_{VI} = 100$

$c^o = g_T, \quad g_c^o = -1$

1) $P_{VC} = P_{VI} - \frac{g_1 L}{200}$

$P_{VC} = 100 - \frac{3 \times L}{200}$

$X_{c^o} = \frac{|g_1 - g_c^o|}{A} \times L = \frac{|3 - (-1)|}{5} \times L = 0.8L$

$c^o = P_{VC} + X_{c^o} - g_c^o$

$g_T = (100 - 0.015L) + \frac{3 \times 0.8L}{100} - \frac{5 \times (0.8L)^2}{200L}$

$g_T = 100 - 0.015L + 0.024L - 0.016L$

$L \approx 429 m$

e) For turning point $y_c^0 = 0.0$ ($L = 429\text{m}$)

$$x_c^0 = \frac{3}{5} * L = 257.4\text{m}$$

$$y_c^0 = \frac{5 * (257.4)^2}{200 * 429} = 3.86$$

$$y_c^0 = \frac{3 * 257.4}{100} = 7.722$$

$$\checkmark \text{ turning} = (100 - 0.015 * 429) + 7.722 - 3.86$$

$$\checkmark \text{ turn} = 97.43\text{m}$$

e) assume $S < L$

$$L = \frac{A S^2}{400}$$

$$429 = \frac{S * S^2}{400}$$

$$S = 185.25\text{m} < L \quad (0.1)$$

$$S = 0.278 \sqrt{(2.5)} + \frac{\sqrt{2}}{255 (0.3 - 0.005)}$$

$$\sqrt{2} + 52.28 \sqrt{2} - 13935 = 0.0$$

$$\sqrt{2} = 94.76 \text{ km/h}$$

Q 2-b

$$V_B = ?$$

$$V_A = 100 \text{ KPH.}$$


(15)

5

$$a = 52 - 1.5 \times \frac{13}{4} = 47.125 \text{ m}$$

$$b = 32 + \frac{7}{4} = 33.75 \text{ m}$$

$$\frac{d_B}{d_A} = \frac{a}{d_A - b}$$

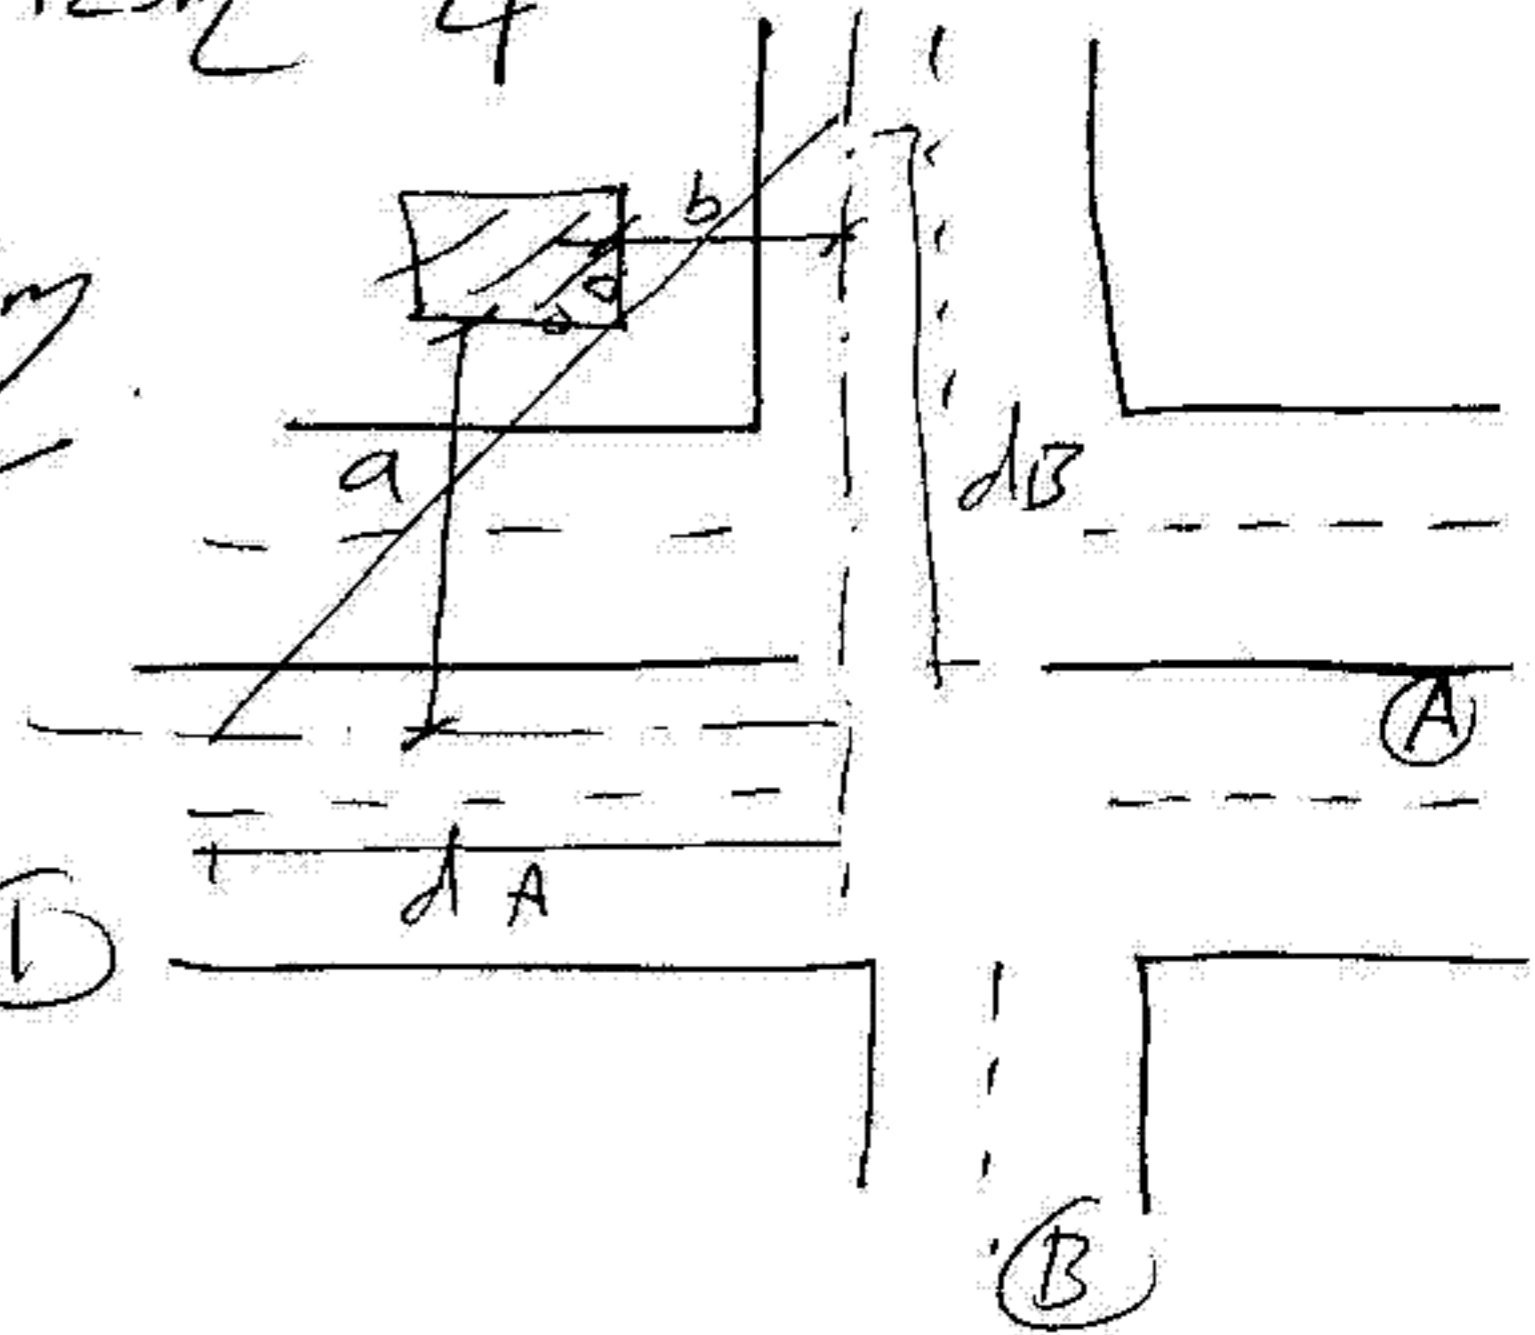

For adjust speed

$$d_A = 0.278 \times 100 \times 3 = 83.4 \text{ m}$$

from ①

$$d_B = d_A \left(\frac{a}{d_A - b} \right) = 83.4 \times \left(\frac{47.125}{83.4 - 33.75} \right)$$

$$d_B = 79.16 \text{ m} = 0.278 V_B \times 3$$

$$V_B \approx 95 \text{ KPH}$$

For case to stop


$$d_A = 0.278 \times 100 \times 2.5 + \frac{(100)^2}{255 (0.3)} = 200 \text{ m}$$

$$d_B = 56.7 \text{ m} = 0.278 V_B \times 2.5 + \frac{V_B^2}{255 (0.3)}$$

$$V_B^2 + 53.17V_B - 1337.6 = 0 \quad \text{⑥}$$

$$V_B = 44.43 \text{ KPH} \quad 4$$

- if controlled

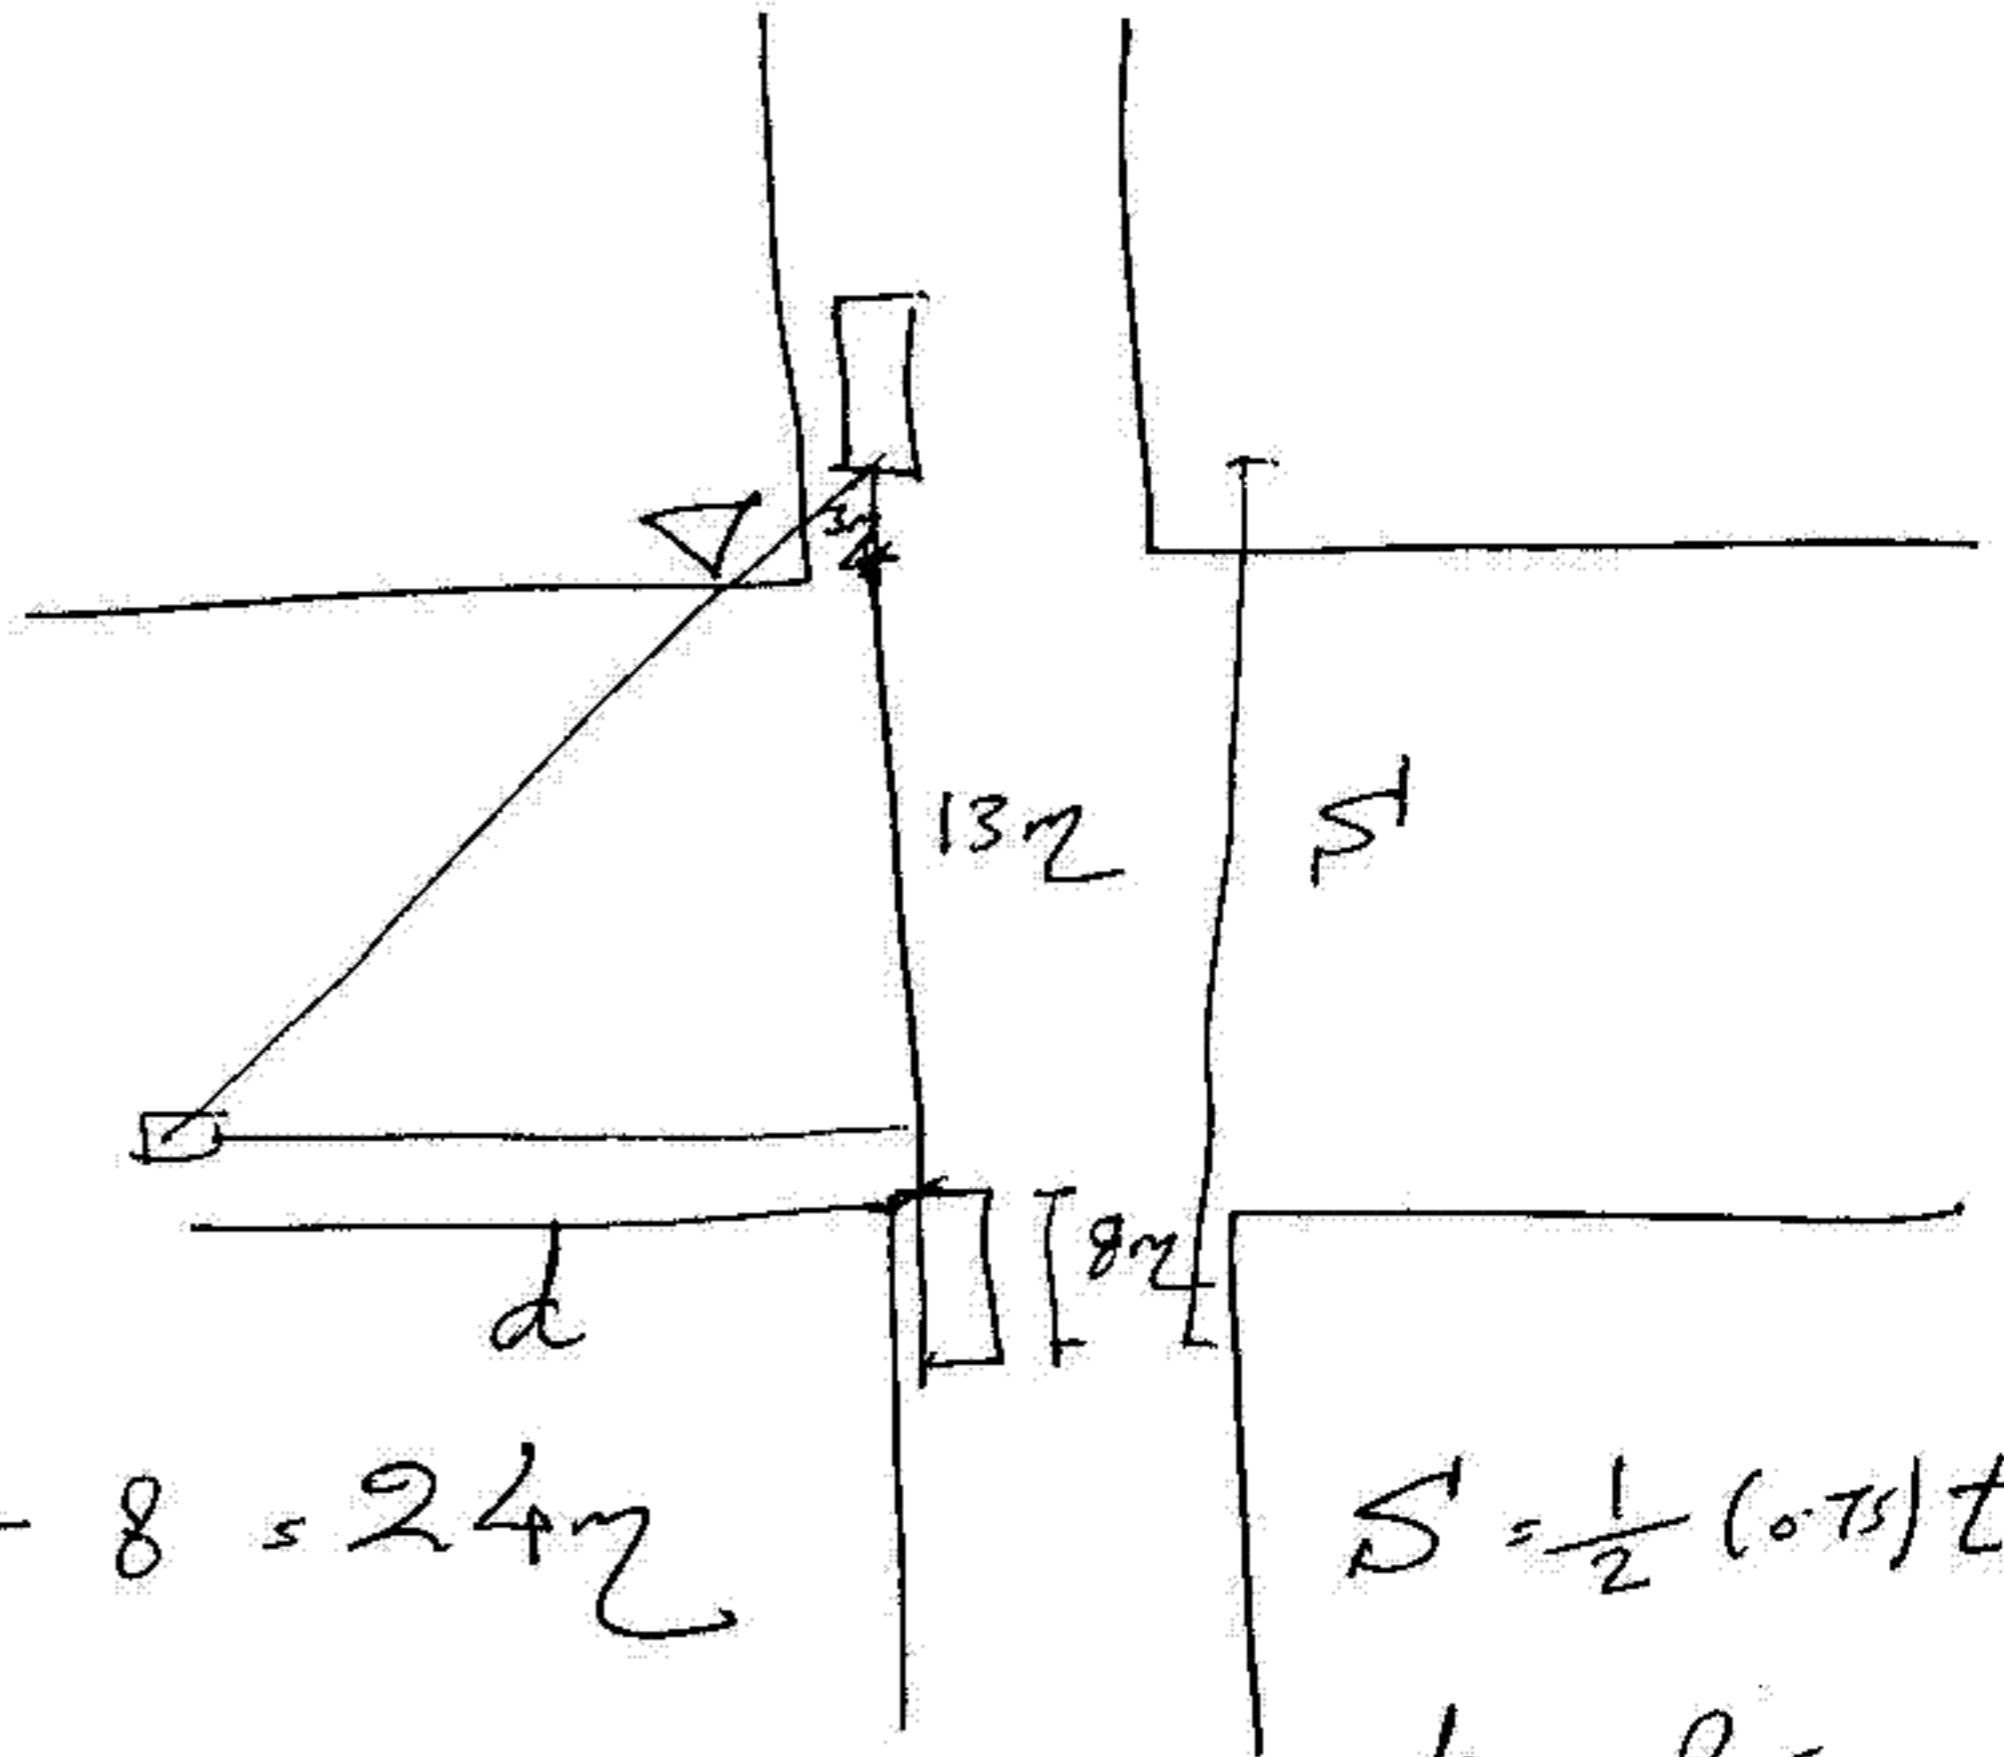

$$S = 3 + 13 + 8 = 24 \text{ m}$$

$$S = \frac{1}{2} (0.75) t_a^2$$

$$t_a = 8 \text{ sec}$$

$$d = \frac{0.278 (100) (2 + 8)}{3} = 278 \text{ m}$$



Structure Design.

35

7

Q3.

a)

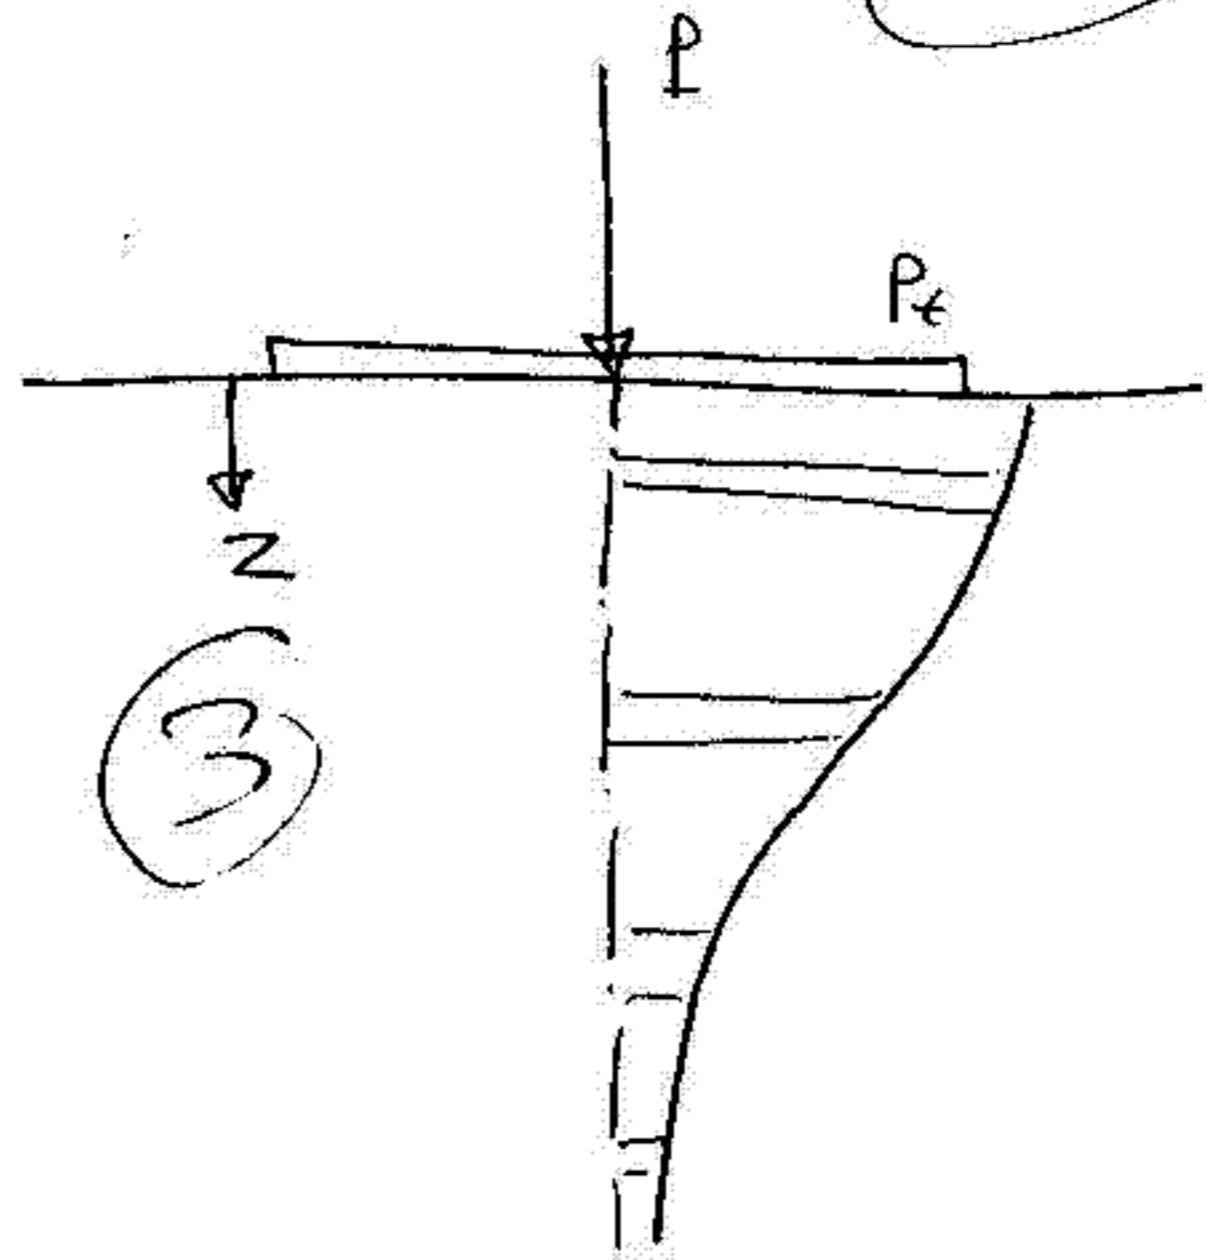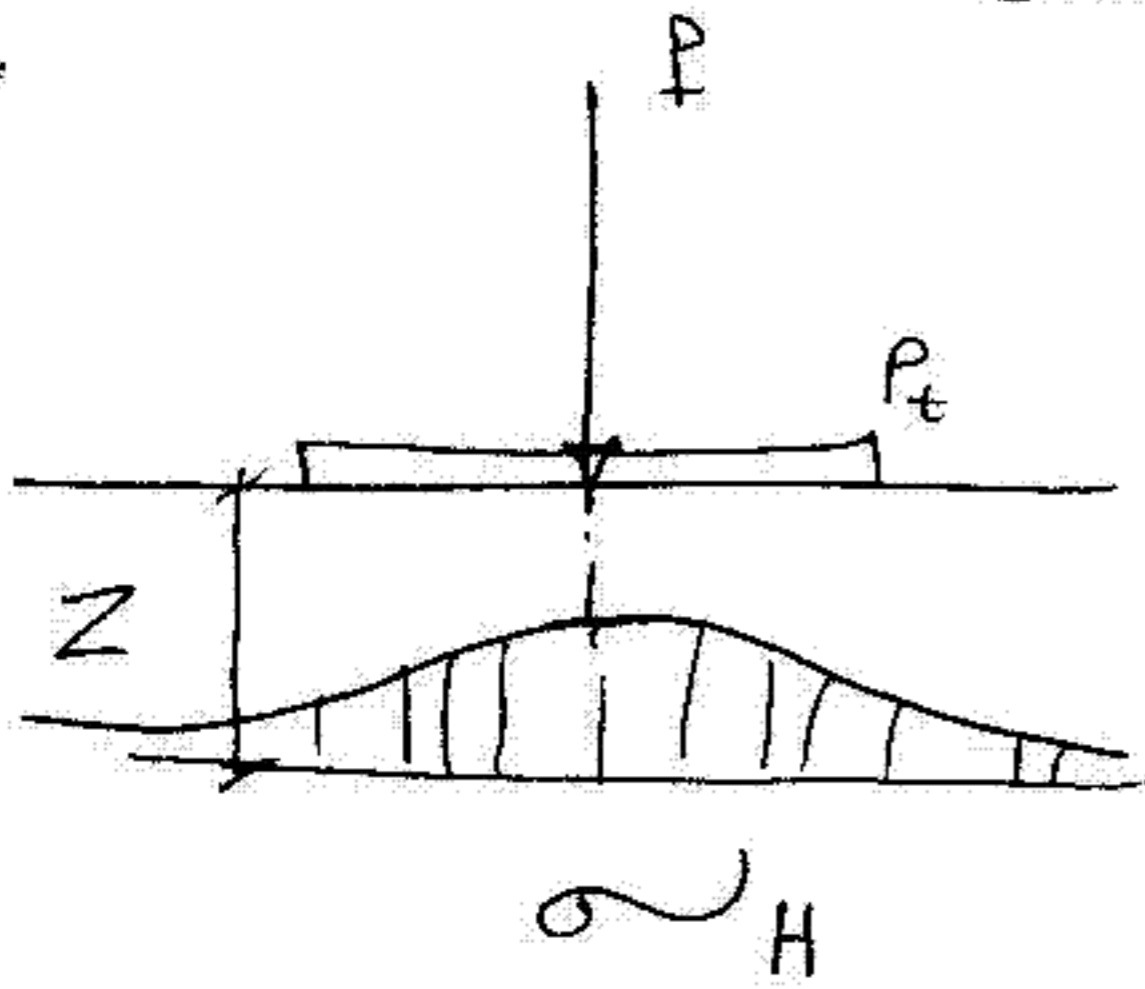

3

b)

$$G_{agg} = \frac{100}{\frac{40}{2.74} + \frac{52}{2.77} + \frac{8}{2.86}} = 2.76$$

13

$$G_{asp} = 1.02$$

ASSUME $V_t = 1 \text{ Ft}^3$

$$\% V_a = 4\% = \frac{V_a}{V_t} \times 100$$

4

$$\therefore V_a = 0.04 \text{ Ft}^3$$

$$\therefore V_{asp} + V_{agg} = 0.96 \text{ Ft}^3 \quad \text{--- (1)}$$

$$\therefore \tau_m = 151 = \frac{W_t}{V_t} \quad \therefore W_t = 151 \text{ lbs}$$

$$W_{asp} + W_{agg} = 151 \text{ lbs} \quad \text{--- (2)}$$

$$\therefore V_c = \frac{W_c}{E_s c \times \tau_w}$$

$$V_{agg} = \frac{W_{agg}}{2.76 \times 62.4} = 0.0058 W_{agg} \text{ in (1)}$$

$$V_{\text{asp}} = \frac{W_{\text{asp}}}{1.02 \times 62.4} = 0.0157 W_{\text{asp}} \quad \text{in (1)}$$

8

$$0.0157 W_{\text{asp}} + 0.0058 W_{\text{agg}} = 0.96 \quad \text{3}$$

$$W_{\text{asp}} + W_{\text{agg}} = 151$$

$$W_{\text{asp}} = 151 - W_{\text{agg}}$$

$$0.0157(151 - W_{\text{agg}}) + 0.0058 W_{\text{agg}} = 0.96$$

$$0.0099 W_{\text{agg}} = 1.4107$$

$$W_{\text{agg}} = 142.5 \text{ lbs}$$

$$W_{\text{asp}} = 8.50 \text{ lbs}$$

$$W_t = 151 \text{ lbs} \quad \text{3}$$

$$\% \text{ AC} = \frac{8.5}{142.5} \times 100 = 5.96\% \text{ of Agg.}$$

$$\% \text{ AC} = \frac{8.5}{151} \times 100 = 5.63\% \text{ of total wt.}$$

$$c) \sigma_c = 10 \text{ Psc}^0$$

9

$$\sigma_c = \left(\frac{m}{100}\right) \times P_t$$

9

$$10 = \left(\frac{m}{100}\right) \times 105 \quad \therefore \boxed{m = 10}$$

$$a = \sqrt{\frac{30000}{\pi \times 100}} = 9.77''$$

from Fig 6.4

$$m = 10, \quad \frac{r}{a} = 50.0$$

$$\frac{Z_{eq}}{a} \approx 3.7$$

$$Z_{eq} = 3.7 \times 9.77 = 36.15''$$

$$Z_{eq} = 4 \times \sqrt[3]{\frac{EI}{2000}} + 8 \times \sqrt[3]{\frac{29000}{2000}} = 36.15$$

$$\boxed{E_1 = 211464 \text{ Psc}^0}$$

3

d) $P = 100,000 \text{ lbs}$

$P_t = 150 \text{ PSC}$


$\Delta = 0.1''$

$E_1 = 500,000$

$t = 25''$

(10)

(10)

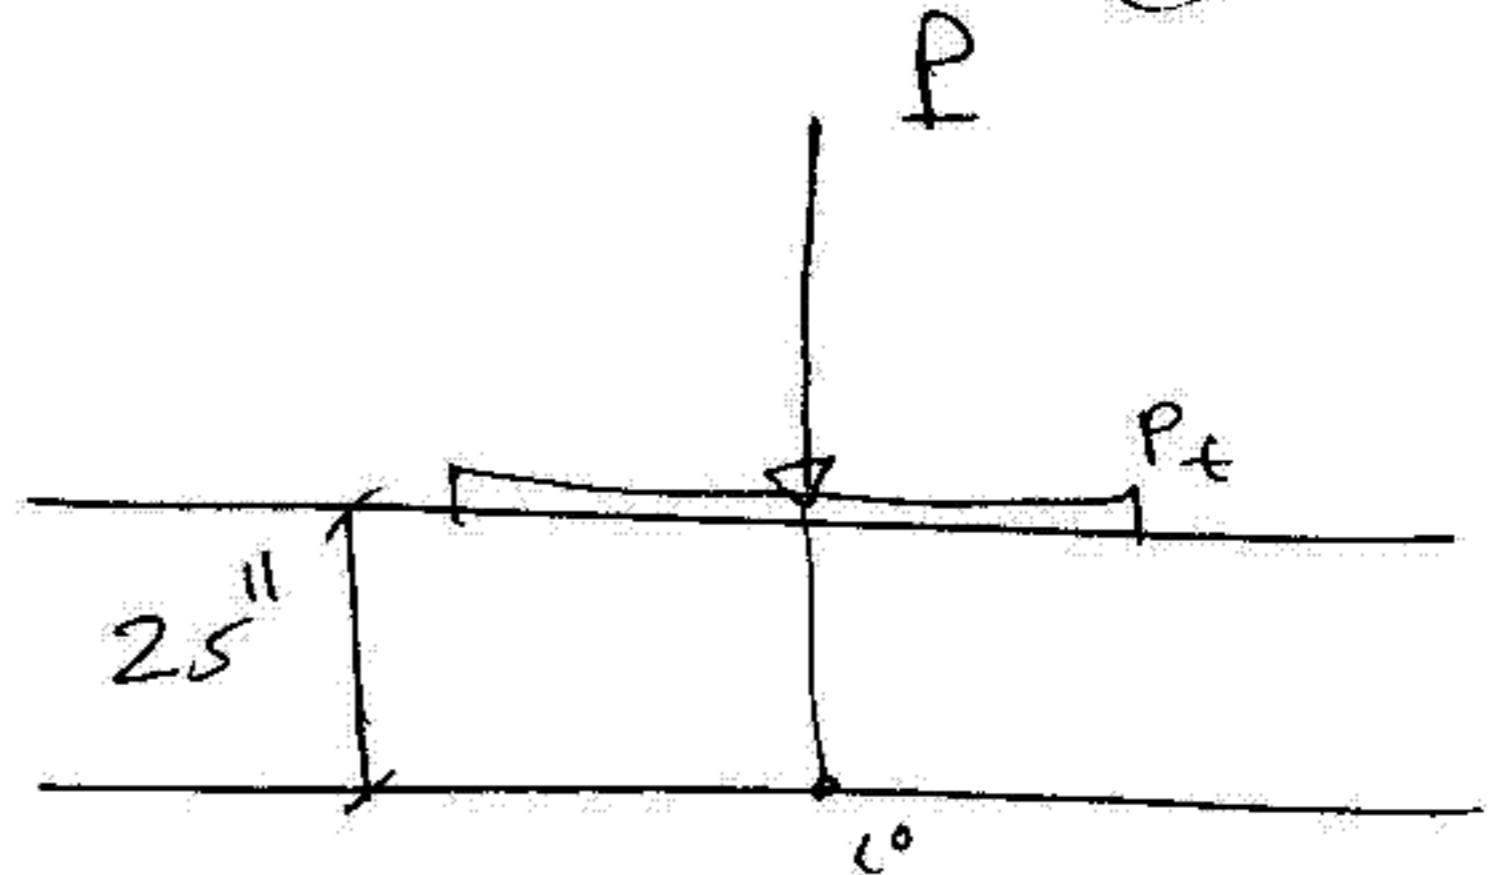

$\Delta = 1.18 \alpha'' \cdot \frac{P_t}{E_2} \cdot P$

3


$\alpha'' = \sqrt{\frac{100,000}{\pi \cdot 150}} = 14.57''$

$\frac{Z}{\alpha} = \frac{25}{14.57} = 1.72$

E_1/E_2	$\frac{1}{100}$	$\frac{1}{200}$	$\frac{1}{500}$
E_2	5000	2500	1000
P	0.15	0.075	0.08
Δ	0.077	0.092	0.206

4

$E_2 \approx (2200 \rightarrow 2300) \text{ PSC}$

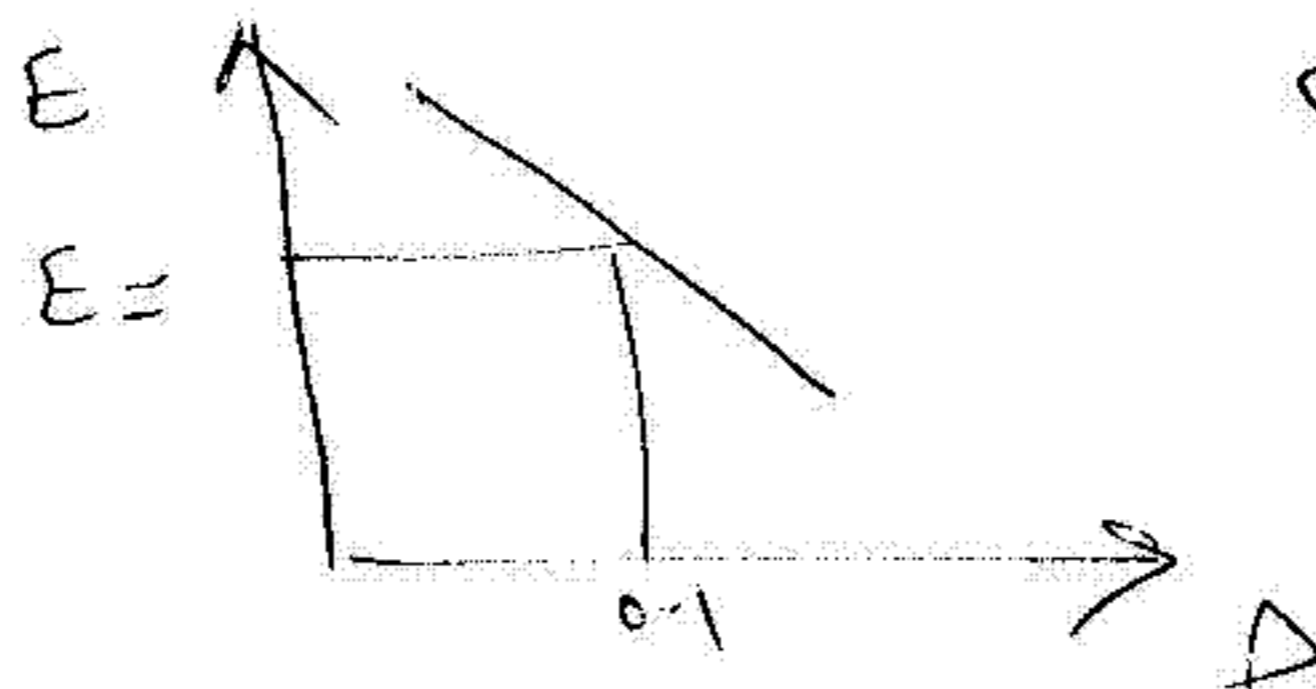

3

Q4.

11

a)

$$ESAL_{daily} = ADT * \sum_{i=1}^n (T_i * T_i) C_i$$

$$= 5000 (0.04 * 3 + 0.03 * 7 + 0.29 * 5 + 0.07 * 2)$$

$$= 9600$$

assume D.D = 0.7
L.D = 1 2 lane or 4 lane.

$$G_r = \frac{(1.02)^{15} - 1}{0.02} = 17.29$$

$$ESAL_{design} = 9600 * 365 * 0.7 * 1 * 17.29$$

$$= 42.4 * 10^6$$

b)

$$a_1 = 0.44$$

$$n_1 = 1$$

$$d_1 = t$$

$$a_2 = 0.14$$

$$n_2 = 0.8$$

$$d_2 = 2t$$

$$a_3 = 0.11$$

$$n_3 = 0.6$$

$$d_3 = 4t$$

$$S_{N3} = 3.7$$

$$3.7 = 0.44 t + 0.14 * 0.8 * 2t + 0.11 * 0.6 * 4t$$

$$t \approx 3.99 = 4''$$

$$\therefore \begin{cases} d_1 = 4'' \\ d_2 = 8'' \\ d_3 = 16'' \end{cases}$$

Q4.

11

a)

$$ESAL_{daily} = ADT * \sum_{i=1}^n (T_i * 10^4) C_i$$

$$= 5000 (0.04 * 3 + 0.03 * 7 + 0.29 * 5 + 0.07 * 2)$$

$$= 9600$$

assume $D.D = 0.7$
 $L.D = 1$ 2 lane or 4 lane.

$$G_r = \frac{(1.02)^{15} - 1}{0.02} = 17.29$$

$$ESAL_{design} = 9600 * 365 * 0.7 * 1 * 17.29$$

$$= 42.4 * 10^6$$

b)

$$a_1 = 0.44$$

$$r_1 = 1$$

$$d_1 = t$$

$$S.N_3 = 3.7$$

$$a_2 = 0.14$$

$$r_2 = 0.8$$

$$d_2 = 2t$$

$$a_3 = 0.11$$

$$r_3 = 0.6$$

$$d_3 = 4t$$

$$3.7 = 0.44 t + 0.14 * 0.8 * 2t + 0.11 * 0.6 * 4t$$

$$t \approx 3.99 = 4''$$

$$\therefore \begin{cases} d_1 = 4'' \\ d_2 = 8'' \\ d_3 = 16'' \end{cases}$$

c)

$$S_N = 0.42 * 4 + 0.12 * 0.8 * 8 = 2.45$$

12

$$\Delta P_{SC} = 4.5 - 1.5 = 3$$

$$R = 90\% \quad S_0 = 0.4$$

$$M_{r_{\text{subgrade}}} = 5000 \text{ psi} \quad 4$$

From fig.

$$ESAL = 0.05 * 10^6$$